




Super soft, flexible and comfortable. Hi-Vis yellow colour. 13 gauge, cut level C, sandy nitrile. Reinforced.

## KEY FEATURES

- High quality cut protection level C glove with high abrasion resistance
- High quality coating with advanced technology contributes to extra softness and comfort
- Reinforcement greatly extends glove life to save your cost and provides extra protection in the weakest area
- Sandy finish provides super grip in oily and dry working condition
- Soft, flexible and comfortable. Good fitting
- High-Visibility yellow provides extra safety in challenging light conditions and perfect fit for high visibility work wear
- 360° breathability
- OEKO-TEX standard 100 certified for skin friendly
- Contact heat protection up to 100 °C according to EN407

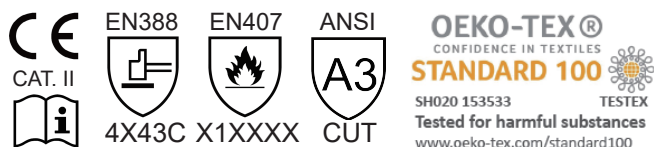


## PRODUCT DETAILS

Liner	UHMWPE mixed with other yarns
Gauge	13
Coating	Nitrile
Finishing	Sandy
Colour	Hi-vis Yellow / Black
Size	7,8,9,10,11
Packing	12 pairs/pack, 144 pairs/carton
Tariff number	61161020

## RECOMMENDED APPLICATIONS

**General purpose or works with high cut hazard or contact heat hazard in dry or light oily conditions or challenging light conditions.**

Such as handling sharp or rough parts, outdoor works, automotive industry, mining, construction, metal sheet works, maintenance, assembly, inspection...



## CERTIFICATION

**CE** EN420:2003 + A1:2009

Category II

**EN388:2016 Mechanical protection:  
levels obtained in laboratory tests**

Abrasion (min.0 to max. 4):	<b>4</b>
Blade cut - coupe test (Index) (min.0 to Max. 5):	<b>X</b>
Tear (min.0 to max. 4):	<b>4</b>
Puncture (min.0 to max. 4):	<b>3</b>
Cut resistance from sharp objects EN ISO 13997:1999 (min. A to Max. F, X - not tested):	<b>C</b>
Impact protection (P if pass, F if failed):	-

EN388:2016



4X43C

**EN407:2004 Heat protection:  
levels obtained in laboratory tests**

A - Burning behaviour:	X of 4
B - Contact heat:	1 of 4
C - Convective heat:	X of 4
D - Radiant heat:	X of 4
E - Small drops molten metal:	X of 4
F - Large quantity molten metal:	X of 4

EN407:2004



X1XXXX

X = not tested or testing method is unsuitable for the design of the gloves.

## STORAGE AND SHELF LIFE

Please store the products in original packing in a dry and cool place without direct sunlight in general. The shelf life depends on the storage and other conditions. For the new product stored in a properly way, the shelf life of Xcellent 12-354 can normally be 5 years.

## CLEANING

Washing or dry-cleaning requires prior consultation with a recognized specialist, because such treatment may alter the protective properties of the glove. The gloves must always be checked for integrity before reuse. The rating with the marked performance levels based on tests on unused gloves.

## WARNING

Don't use in case of chemicals, moving machines or electrical risk. Please ensure the products are strictly used within their protection levels.

